



IGNIS I

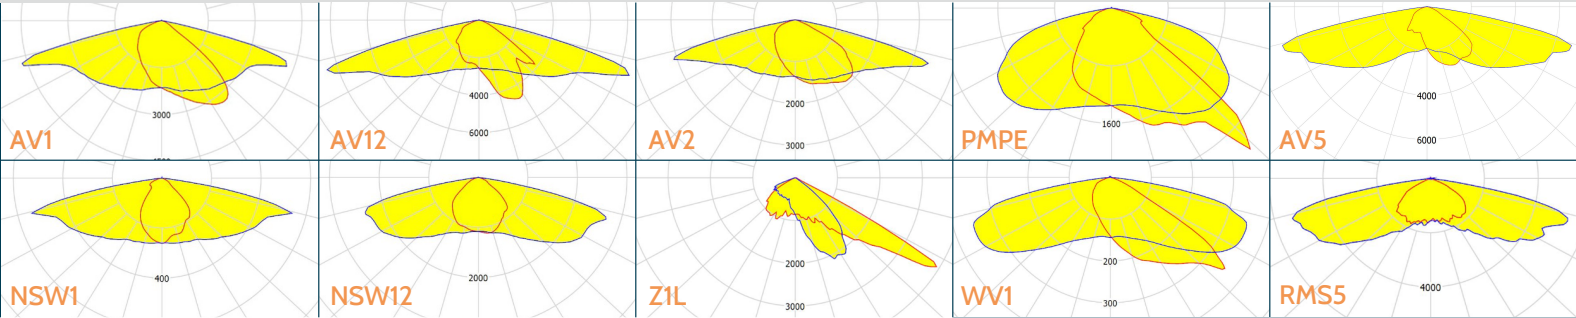

Introducing IGNIS I

The IGNIS 1 is our mid-size luminaire in our IGNIS family. Designed to replace 150W and 250W HPS, with market leading optical performance and uniformity without compromising on lumens per watt or reliability. Versatile, the IGNIS 1 is available in high output or CLO optimised LED chip configurations to best suit your needs, for peak performance or hitting energy saving targets. The IGNIS range offers installation flexibility with Lumen Boost; tune your lantern stock to the desired output quickly and safely to suit your lighting needs.

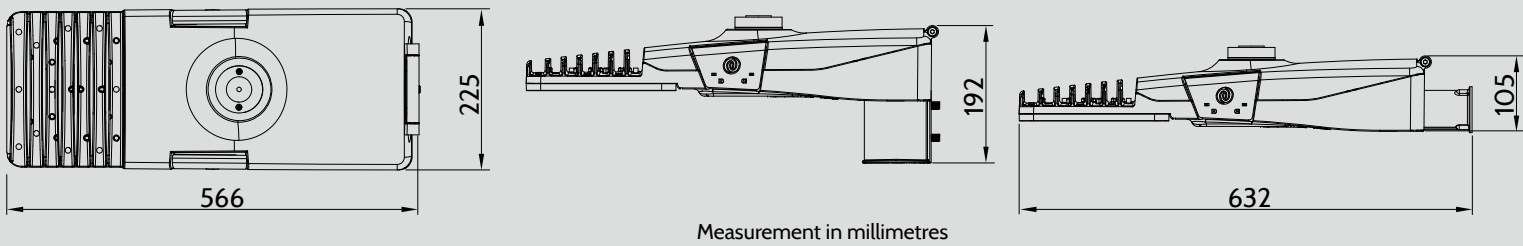

Product Features



3 Tool free, secure latching power compartment

4 Adjustable integral spigot.



- SmartCity Ready
- Tool Free Access
- CLO Available
- IP66
- Upto IK08
- Preset Dimming
- ZEBRA lens available
- Surge Protection
- Tilt angle adjustment +10° to -15°
- Lightweight LM6 aluminium
- Bubble Level Ready

Lantern Information

Weight	8.2 kg
Windage	0.048 m ²
RAL codes	Black: RAL 9004 Grey: RAL 7040
Mounting sizes	76, 60, 42, 34mm
Operating temperature	-40°C - 50°C

Visit: www.orange tek.co.uk
to find out more or call our sales Team

AUS : +61 450 727 253
NZ: +64 225 160 579

All facts and figures correct at time of printing, subject to change.

Lumen Boost

Tune your driver and lumen output to provide the specific light level required, reducing your lantern variations. Photometry is available in incremental lumen steps to simplify design process and maximise energy savings.

International Dark-Sky Association Approved

IGNIS 1 Luminaires are compliant when using a colour temperature of 3,000K or below and at zero degree tilt. Please contact your sales representative for Dark sky approved configurations.

LED Quantity	Lumen output range	RA/CRI index	CCT	Lumens per watt
36 & 72 LEDS	2800 - 16,500 lumens	>70 Standard	3000k, 4000k,	Up to 140 lm/w

